

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 076 316 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
14.02.2001 Bulletin 2001/07

(51) Int. Cl.<sup>7</sup>: **G06K 19/077, G06K 7/08**

(21) Application number: **00202722.5**

(22) Date of filing: **31.07.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **11.08.1999 US 372329**

(71) Applicant:  
**EASTMAN KODAK COMPANY**  
(a New Jersey corporation)  
Rochester, New York 14650 (US)


(72) Inventors:  
• **Spurr, Robert W.,**  
Eastman Kodak Company  
Rochester, New York 14650-2201 (US)

• **Tehranchi, Babak,**  
Eastman Kodak Company  
Rochester, New York 14650-2201 (US)  
• **Sanger, Kurt M.,**  
Eastman Kodak Company  
Rochester, New York 14650-2201 (US)  
• **Tredwell, Timothy,**  
Eastman Kodak Company  
Rochester, New York 14650-2201 (US)

(74) Representative:  
**Lewandowsky, Klaus, Dipl.-Ing. et al**  
Kodak Aktiengesellschaft,  
Patentabteilung  
70323 Stuttgart (DE)

(54) **A print having information associated with print stored in a memory coupled to the print**

(57) A print (30) having information associated with the print stored in a memory (24) coupled to the print. The print, processed by an image processing apparatus, having an attached memory for storing detailed information about the print and allowing contactless access using an electromagnetic frequency signal. A transceiver (50), connected to a control logic device (32), communicates with a transponder (22) that is attached to the print substrate and is integrally coupled to the memory. The transponder is capable of receiving a first electromagnetic field (frequency) from the transceiver and deriving power and address information from the first frequency, then generates a second electromagnetic field (frequency) in response, where the second electromagnetic field is characteristic of the data stored in memory.

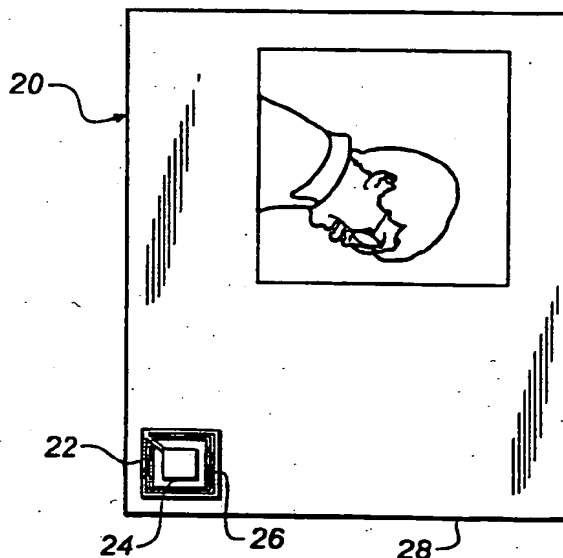

**FIG. 1**

EP 1 076 316 A2

## Description

[0001] This invention generally relates to prints processed by image processing apparatus and more particularly relates to a print having information associated with the print stored in a memory coupled to the print.

[0002] There can be a considerable amount of information associated with an image produced on a print by an image processing device. It is beneficial to have this information integrally attached to the print and, therefore, readily available for access. This is particularly true for high-quality image prints such as those produced by a digital proofing system, such as the "APPROVAL Digital Proofing System"™ available from the Eastman Kodak Company, located in Rochester, New York, U.S.A. For such a system, an image on an output print is carefully analyzed for its overall appearance and color content. Adjustments for improving appearance and color are made using the output print. In practice, the output print from such a system is also used as a contractual tool, requiring customer approval before an expensive four-color printing operation is initiated. For a print from such a digital proofing system, because such a system is designed to emulate printing press output, it is important to know the exact conditions under which an image was printed. Variables such as dot shape, screen angle, screen ruling, densities of component colors and dot gain adjustments can be modified for images printed from such systems, depending on corresponding characteristics of the target four-color printing system that will be used for the finished product. Because an image is prepared using any one of a number of digital prepress systems, it is also beneficial to identify the specific system upon which the image has been processed, along with information identifying a filename associated with the image that is reproduced.

[0003] To provide information on the proofing variables used to prepare a specific digital proof, and to provide other identifying information about the proof, proofing systems such as the "APPROVAL Digital Proofing System"™ record key identification and image processing variables on the proof itself, typically printed apart from the image, such as in an extreme corner of a proof sheet. This method serves the needs of an observer viewing the proof, but does not easily allow automated methods to facilitate access of this information for display, archiving, or the like.

[0004] The need to store detailed information about a printed image is also an important requirement for a diagnostic image, such as an image obtained by scanning using X-rays, ultrasound, or CAT (Computerized Axial Tomography). Such images typically have a significant amount of information related to them. For example, in the case of a medical diagnostic image, detailed information on patient name, patient age, patient history, physician's name, facility name, and other information accompany the image so that the image can be correctly analyzed and tracked. Methods used for attaching detailed information with such a diagnostic image include encoding information on the edge of the film substrate containing the image.

[0005] In addition, photographic negative film can be encoded with information to assist in film processing. For example, a negative film cassette using APS (Advanced Photo System) technology, such as the KODAK "ADVANTIX"™ film available from the Eastman Kodak Company allows a camera to record information on those conditions under which a negative film was exposed when taking a photograph. This information is recorded on a thin magnetic layer disposed on the negative film substrate. Using the APS technology, when a photoprocessing apparatus creates a print from the developed negative film, the apparatus then prints information obtained from the magnetic layer disposed onto the back of the print. Typically, date and time the print was taken are back-printed on the reverse side of the print. However, other than back-printing of this relatively small amount of data, other useful information is not encoded onto the print.

[0006] Thus, it is desirable to attach identifying and processing information to the print. In this regard, the need for attaching information to an output print is based on how a print is used. Factors that determine how useful it is to attach information to a print include the overall value of a print, the complexity and significance of setup conditions required for obtaining and printing an image on a print in a specific way, and the desirability of obtaining more detailed information about the subject of an image appearing on the print. From this perspective, the capability to integrally attach identifying and processing information to a print serves a wide range of image processing functions including, but not limited to, digital proofing, diagnostic imaging, professional and portrait imaging, and aerial photography.

[0007] Conventional methods for attaching information about a printed image on a print include providing information on an attached magnetic strip. This solution allows storage of some data, but has inherent disadvantages. For example, magnetically encoded media must be protected from magnets or strong electromagnetic fields. Reading information from this type of media requires placing the media, in proper orientation, into a reader device. Determining whether or not a specific image is included in a collection of prints stacked or stored together requires manually searching through the collection of prints or handling prints individually, so as to feed each print to the reader device.

[0008] Attachment of an electronic memory component to the print substrate has inherent disadvantages when physical connection must be made to the memory component for recording or obtaining information stored in the memory component. Connectors add cost and present reliability problems caused by dust and dirt and repeated connection/disconnection duty cycles.

[0009] RFID (Radio Frequency Identification) tags having an integrally attached memory are commercially available and are used in applications where it is useful to store unique identifying information that is attached to an item.

RFID tags have been proposed for use in applications with passports and credit cards, such as is disclosed in U.S. Patent No. 5,528,222 issued to June 18, 1996 to Moskowitz et al. A commercially available "TAG-IT INLAY™", available from Texas Instruments, Incorporated, located in Dallas, Texas, USA, can be used to provide identifying information about a device to which it is attached. This relatively thin, flexible type of RFID tag can be used in an application that previously required a label or bar code. The applications noted in U.S. Patent No. 5,528,222 and mentioned for the "TAG-IT INLAY™" device and similar devices are primarily used for identification purposes, such as for employee badges, inventory control, and credit card account identification.

[0010] A memory can be attached to a consumable used as the input "raw material" for an image processing apparatus. In this regard, an RFID transponder component can have a memory integrally attached thereto, the memory being connected to a consumable item. With this feature, an image processing apparatus can identify each consumable type loaded therein and adapt its operation accordingly to provide an optimum image. However, such a memory device is used for an input consumable only. However, as described hereinbelow, an output print produced from such a system would also benefit from attachment of a memory component.

[0011] It is an object of the present invention to provide, from an image processing apparatus, an output print having an attached memory that is capable of storing information associated with the image printed thereon.

[0012] According to an aspect of the present invention, a print output from an image processing apparatus comprises an attached non-volatile semiconductor memory component that is integrally coupled to a transponder. The memory component may be, for example, an EEPROM (Electrically Erasable Programmable Read-Only Memory). Stored in the memory are encoded data indicative of the identity of the images on the print and indicative of specific conditions under which the print was processed. The transponder is capable of receiving a first electromagnetic field (frequency) generated by a radio-frequency transceiver unit. The transponder provides power to its coupled semiconductor circuitry as the transponder receives the first electromagnetic field or frequency. When the transponder circuitry is powered, the component generates a second electromagnetic field (frequency) in response to the first electromagnetic field. The second electromagnetic field is conditioned by information stored in the memory.

[0013] A feature of the present invention is the provision of a transceiver that stores information about a print and its images on a memory that is attached to a print substrate. A related feature of the present invention is the ability of a transceiver to retrieve stored information from this memory.

[0014] A further feature of the present invention is the provision of a transceiver that selectively addresses a specific transponder from among a plurality of transponders attached to respective ones of a collection prints and to transfer data to or from that transponder, where the data transferred is indicative of image identity or print processing.

[0015] An advantage of the present invention that use thereof allows detailed information uniquely associated with a print to be integrally attached to the print for automated reading and retrieval.

[0016] A further advantage of the present invention that use thereof allows automated identification of a print when that print is included in a collection of prints, each print in this collection having an attached memory. In this regard, the present invention allows an operator to quickly scan a box containing a plurality of prints and to quickly identify and independently access information concerning each print in the box, without handling the prints individually. This facilitates inventory control and archiving of processed prints.

[0017] Yet a further advantage of the present invention that use thereof allows storage, on the print itself, information concerning how the print was produced, including processing variables.

[0018] A further advantage of the present invention that use thereof provides a contactless communication interface, accessing data without requiring that electrical contact be made to corresponding contacts being mounted on a print.

[0019] These and other objects, features, and advantages of the present invention will become apparent to those skilled in the art upon a reading of the following detailed description when taken in conjunction with the drawings wherein there is shown and described an illustrative embodiment of the invention.

[0020] While the specification concludes with claims particularly pointing out and distinctly claiming the subject matter of the present invention, it is believed that the invention will be better understood from the following description when taken in conjunction with the accompanying drawings, wherein:

Figure 1 is a plan view of a proof sheet output from a digital proofing system, the proof sheet having an attached transponder;

Figure 2 is a schematic representation showing communication between a transponder and a transceiver, the transponder being attached to a print;

Figure 3a is an enlarged plan view of an antenna provided on an edge of a print;

Figure 3b is an enlarged plan view of a transponder integrated circuit attached to the antenna shown in Figure 3a; and

Figure 4 is a schematic representation showing use of a hand-held reader device.

[0021] The present description is directed in particular to elements forming part of, or cooperating more directly with, apparatus in accordance with the invention. It is to be understood that elements not specifically shown or described may take various forms well known to those skilled in the art.

[0022] For the description that follows, the general term "print" is used herein to indicate an output image reproduced onto a substrate, where the image is reproduced using ink, dyes, or known exposure methods. By way of example only, and not by way of limitation, a print, generally numbered 30 in the following description, could be any of the following:

a printed output sheet, such as from a proofing system, including digital proofing systems that use thermal print technologies, from inkjet printers, or from photofinishing printers that use photosensitive film or paper that is exposed to a light source and developed using a subsequent chemical process for creating an image;

a photographic print;

a developed X-ray, ultrasound, or other diagnostic image; or

an aerial photograph.

[0023] A substrate, generally numbered 42 in the following description, is typically in sheet form and may include, for example, film, paper, cardboard, textile, vinyl, or other material capable of accepting a printed image.

[0024] Fig. 1 shows a transponder 22, which may be a "TAG-IT INLAY"™, attached to a digital proof sheet 20 imaged onto a substrate 28, which may be paper. Transponder 22 includes a memory 24, an antenna 26, and RF communication and power supply circuitry. Transponder 22 can be attached to the front or back of digital proof sheet 20 using an adhesive-tape backing or can other attachment arrangement, as described hereinbelow.

[0025] Referring again to Fig. 1, transponder 22 is shown attached along an edge of paper substrate 28, away from an image area of proof sheet 20. However, it may be appreciated that this is but one possible arrangement, because, using any of the attachment methods described hereinbelow, transponder 22 may be attached in any suitable position on proof sheet 20.

[0026] It is useful to note that similar methods of attachment to the substrate as described for digital proof sheet 20 in Fig. 1 and as described hereinbelow may alternately be used for any type of print 30, such as a photographic print, X-ray or other diagnostic image, aerial photograph, or other printed output.

[0027] Fig. 2 shows, in schematic form, a system for programming or retrieving information from print 30 which has transponder 22 attached thereto. Print 30 itself may be the previously mentioned proof sheet 20 or a photographic print, or any other type of print. In this arrangement, a transceiver 50 is connected to a computer 32. Such a transceiver 50 may be, for example, a "HOUSED READER AND ANTENNA" transceiver, part number RI-K01-320A-00, available from Texas Instruments, Incorporated, located in Dallas, Texas, USA.

[0028] Transceiver 50 connects to an antenna 56. In operation, transceiver 50 is capable of transmitting a first electromagnetic field (frequency) 64 of a first predetermined frequency, for reasons disclosed presently. Transceiver 50 is also capable of receiving a second electromagnetic field (frequency) 66 of a second predetermined frequency, for reasons disclosed presently. Typically, but not necessarily, the same frequency serves for both first and second electromagnetic fields 64 and 66.

[0029] Transponder 22, itself, is a relatively low-power device that derives its source power from the first electromagnetic field 64 emitted by transceiver 50. In this regard, communication via antenna 56 between transceiver 50 and transponders 22 can take place over a limited distance.

[0030] Referring again to Fig. 2, transceiver 50 is electrically coupled to computer 32, such as by means of a signal interface 68, which signal interface 68 may be, for example, a standard RS-232C serial connection. This connection allows computer 32 to control the operation of transceiver 50 so that transceiver 50 can successively poll one or more transponders 22 in order to access information about one or more prints 30. Computer 32, which may be a standard personal computer, can be programmed to read data from the print (as accessed by transceiver 50) and then to display or to process this data, or to write data to the print, using techniques well known in the programming art.

[0031] It is important to note that computer 32 may alternately be embodied within transceiver 50, such as in a "hand-held" reader device. Using this alternate arrangement, an operator can encode information onto print 30 or decode information from print 30 without requiring connection to separate computer 32. This arrangement would be advantageous, for example, for data gathering or image identification purposes.

[0032] Fig. 4 schematically shows an alternate hand-held reader 70. For this configuration of the invention, a control processing unit 72 performs logic control functions necessary to operate transceiver 50, which communicates with transponder 22 on print 30 in the same manner as described above with reference to Fig. 2. A display 74, such as an LCD (Liquid-Crystal Display) well-known in the electronics instrumentation art, displays information read from transponder 22. A keypad 76 allows entry of data for writing information to transponder 22.

Transceiver 50 Communication with Transponder 22

[0033] Referring to Figs. 1 and 4, it is instructive to note how transceiver 50 communicates with transponder 22. Transponder 22 is tuned to a carrier frequency emitted by transceiver 50. By way of example only, but not by way of limitation, this carrier frequency signal is in the RF (Radio Frequency) electromagnetic spectrum. In this manner, the invention uses a transceiver 50 and transponder 22 tuned to an RF frequency. However, the carrier frequency signal need not be in the RF range; rather, the carrier frequency may be at a microwave frequency.

[0034] Upon receiving an initial signal from transceiver 50, transponder 22 circuitry obtains, from the emitted electromagnetic energy, sufficient energy to provide source voltage for its internal circuitry. Thus, no battery is needed to separately power transponder 22.

[0035] When a plurality of transponders are used, each transponder 22 is individually programmed with an unique identifying address code (ID). As a final stage in manufacture, each transponder 22 is programmed to store its ID along with other data that is characteristic of the images, composition, and processing of print 30 to which transponder 22 is attached. Each transponder 22 is manually attached to print 30 as a final assembly stage. Other attachment methods are possible, as is described presently. Transceiver 50 has both read and write access to memory data stored by transponder 22.

[0036] To communicate with transponder 22, transceiver 50 encodes a unique identifying address code as part of its emitted signal, along with a command to read data from or to write data to ("program") transponder 22. Transponder 22 responds to transceiver 50 communication when it has been addressed correctly.

Methods of Attachment for Transponder 22

[0037] As noted hereinabove, transponder 22, which may be a "TAG-IT INLAY"™, is provided on adhesive-backed material for attachment to the print substrate. However, other methods of attachment are possible for transponder 22 within the scope of the present invention.

[0038] For example, as one method of attachment, transponder 22 can be laminated onto print 30. That is, digital proof sheet 20 will undergo a lamination process during final preparation. Alternately, transponder 22 can be embedded within print 30 as a during manufacture of print 30 or during preparation of print 30 for imaging. In this regard, transponder 22 may be embedded within paper substrate 28 of digital proof sheet 20 or within the film substrate used for an X-ray or other diagnostic image.

[0039] Antenna 26 is integrally formed with transponder 22 in the standard "TAG-IT INLAY"™ configuration. However, antenna 26 could be separately provided on a substrate material 42 as shown in Figs. 3a and 3b. This arrangement of the invention would then allow a transponder integrated circuit 36 to be handled separately and affixed to substrate material 42 after programming, as shown in Fig. 3b. Fig. 3a shows a trace pattern of antenna 26 printed directly onto substrate material 42. A pair of antenna contacts 34a and 34b are accessible for connection to transponder integrated circuit 36. Fig. 3b shows transponder IC 36 connected to antenna contacts 34a and 34b. Alternately, antenna 26 could be embedded within substrate material 42, with contacts 34a and 34b extended to the surface of substrate material 42 for connection with transponder integrated circuit 36.

Programming the memory and memory contents

[0040] Transponder 22 that is attached to print 30 can be programmed so that it reads at any time before, during, and after print 30 is processed to contain images. In this regard, transponder 22 is programmed with identifying and process variable information for digital proof sheet 20 after the image is applied onto substrate paper 28. In the case of the KODAK "APPROVAL Digital Proofing System"™, this process involves transfer of the four-color image from an intermediate receiver sheet onto paper substrate 28, using a thermal lamination transfer sequence. Computer 32 programs transponder 22 with identifying and process information based on variables used in the preparation of images intended for reproduction onto digital proof sheet 20.

[0041] By way of example only and not by way of limitation, the data stored in memory 24 of transponder 22 that is attached to paper substrate 28 may be any of the exemplary data displayed in Table 1 hereinbelow.

Table 1

Data Stored in Transponder 22 for Digital Proof Sheet 20		
Data Stored	Number of Bits	Description
Proofing System Identifier	8	An 8-bit number encoding the type of digital proofing system that printed the image.
Filename	128	ASCII-encoded filename of source file(s) for image(s) on digital proof sheet 20.
Date/time stamp	64	Encoded data containing date and time identification for digital proof sheet 20.
Dot gain	256	Encoded values of dot gain for different dot percentages, as applied by the proofing system.
Density settings	128	Encoded density settings for component colors printed on digital proof sheet 20. (Typically, process colors cyan, magenta, yellow, and black are used.)
Dot shape	32	Encoded value indicating shape of halftone dots used on digital proof sheet 20 images.
Screen ruling	16	Encoded value giving screen ruling for halftone dots.
Screen angles	32	Encoded values of screen angles for component colors printed on digital proof sheet 20.
Paper type	16	Encoded value giving intended paper type for digital proof sheet 20.
Thermal donor batch ID	64	Encoded batch identifying information for thermal donor used to create digital proof sheet 20.

[0042] As Table 1 shows, memory 24 includes information on numerous processing variables, including data on the consumable color donor materials used to print the image. Availability of this data facilitates assessment of digital proof sheet 20 and, for example, allows a program running on computer 32 to access and display a significant amount of information concerning digital proof sheet 20.

[0043] By way of example only and not by way of limitation, the data stored in memory 24 of transponder 22, that is attached to print 30 when print 30 uses an X-ray film substrate, may be any of the exemplary data displayed in Table 2 hereinbelow.

Table 2

Data Stored in Transponder 22 for Print 30 on X-ray Film Substrate		
Data Stored	Number of Bits	Description
X-ray System Identifier	8	An 8-bit number encoding the type of diagnostic system that exposed the image.
Filename	128	ASCII-encoded filename of a digital file storing the image data.
Date/time stamp	64	Encoded data containing date and time identification for the X-ray.
Patient ID	256	Name and account number of subject patient.
Medical history	256	Encoded data including highlights of patient medical history, including age, known conditions, medications, surgery performed.
Doctor ID	256	Name and account number of physician.

[0044] A feature of transponder 22 is its ability to temporarily disable a device or to lock individual memory pages in memory. This feature prevents erasure and loss of important data concerning the printed image. At the same time,

3. The storage apparatus of claim 1, wherein said transceiver receives the second electromagnetic field at a predetermined second frequency.
4. The storage apparatus of claim 1, wherein said memory is adapted to store image processing data associated with the image.
5. The storage apparatus of claim 1, wherein said logic processor is a computer.
6. The storage apparatus of claim 1, further comprising:
  - (a) a plurality of said memories coupled to respective ones of a plurality of the output prints; and
  - (b) a plurality of said transponders coupled to respective ones of said memories.
7. A print, comprising:
  - (a) a substrate (42);
  - (b) a memory coupled to said substrate, said memory adapted to store data therein;
  - (c) a transponder connected to said substrate and integrally coupled to said memory, said transponder adapted to receive a first electromagnetic field and, in response to the first electromagnetic field received thereby, generate a second electromagnetic field, the second electromagnetic field being characteristic of the data stored in said memory.
8. The print of claim 7, wherein said substrate material comprises an antenna coupled to said transponder (56).
9. The print of claim 7, wherein said memory has image processing data stored therein.
10. The print of claim 7, wherein said memory is a read/write memory.
11. The print of claim 7, wherein said substrate is paper.
12. The print of claim 7, wherein said substrate is film.
13. A method of assembling a storage apparatus for storing data on an output print produced by an image processing apparatus, comprising the steps of:
  - (a) coupling a memory to the output print, the memory adapted to store computer-readable data associated with an image;
  - (b) integrally coupling a transponder to the memory, the transponder adapted to receive a first electromagnetic field and, in response to the first electromagnetic field received thereby, generating a second electromagnetic field, the second electromagnetic field being characteristic of the data stored in the memory;
  - (c) providing a transceiver spaced-apart from the output print for transmitting the first electromagnetic field and for sensing the second electromagnetic field; and
  - (d) coupling a logic processor to the transceiver, the logic processor adapted to communicate with the transceiver for facilitating exchange of data between the transceiver and the memory.
14. The method of claim 13, wherein the step of providing a transceiver comprises the step of providing a transceiver that transmits the first electromagnetic field at a predetermined first frequency.
15. The method of claim 13, wherein the step of providing a transceiver comprises the step of providing a transceiver that receives the second electromagnetic field at a predetermined second frequency.
16. The method of claim 13, wherein the step of coupling a memory comprises the step of coupling a memory adapted to store image processing data associated with the image.
17. The method of claim 13, wherein the step of coupling a logic processor comprises the step of coupling a logic processor that is a computer.
18. The method of claim 13, further comprising the steps of:

storage apparatus of claim 1, wherein said transceiver receives the second electromagnetic field at a predetermined second frequency.

The storage apparatus of claim 1, wherein said memory is adapted to store image processing data associated with the image.

The storage apparatus of claim 1, wherein said logic processor is a computer.

The storage apparatus of claim 1, further comprising:

- (a) a plurality of said memories coupled to respective ones of a plurality of the output prints; and
- (b) a plurality of said transponders coupled to respective ones of said memories.

7. A print, comprising:

- (a) a substrate (42);
- (b) a memory coupled to said substrate, said memory adapted to store data therein;
- (c) a transponder connected to said substrate and integrally coupled to said memory, said transponder adapted to receive a first electromagnetic field and, in response to the first electromagnetic field received thereby, generate a second electromagnetic field, the second electromagnetic field being characteristic of the data stored in said memory.

8. The print of claim 7, wherein said substrate material comprises an antenna coupled to said transponder (56).

9. The print of claim 7, wherein said memory has image processing data stored therein.

10. The print of claim 7, wherein said memory is a read/write memory.

11. The print of claim 7, wherein said substrate is paper.

12. The print of claim 7, wherein said substrate is film.

13. A method of assembling a storage apparatus for storing data on an output print produced by an image processing apparatus, comprising the steps of:

- (a) coupling a memory to the output print, the memory adapted to store computer-readable data associated with an image;
- (b) integrally coupling a transponder to the memory, the transponder adapted to receive a first electromagnetic field and, in response to the first electromagnetic field received thereby, generating a second electromagnetic field, the second electromagnetic field being characteristic of the data stored in the memory;
- (c) providing a transceiver spaced-apart from the output print for transmitting the first electromagnetic field and for sensing the second electromagnetic field; and
- (d) coupling a logic processor to the transceiver, the logic processor adapted to communicate with the transceiver for facilitating exchange of data between the transceiver and the memory.

14. The method of claim 13, wherein the step of providing a transceiver comprises the step of providing a transceiver that transmits the first electromagnetic field at a predetermined first frequency.

15. The method of claim 13, wherein the step of providing a transceiver comprises the step of providing a transceiver that receives the second electromagnetic field at a predetermined second frequency.

16. The method of claim 13, wherein the step of coupling a memory comprises the step of coupling a memory adapter to store image processing data associated with the image.

17. The method of claim 13, wherein the step of coupling a logic processor comprises the step of coupling a logic processor that is a computer.

18. The method of claim 13, further comprising the steps of:



- (a) coupling a plurality of the memories to respective ones of a plurality of the output prints; and
- (b) coupling a plurality of the transponders to respective ones of the memories.

19. A method of providing a print, comprising the steps of:

- (a) providing a substrate;
- (b) coupling a memory to the substrate, the memory adapted to store data therein;
- (c) connecting a transponder to the substrate and integrally coupling the transponder to the memory, the transponder adapted to receive a first electromagnetic field and, in response to the first electromagnetic field received thereby, generate a second electromagnetic field, the second electromagnetic field being characteristic of the data stored in the memory.


20. The method of claim 19, wherein the step of providing a substrate comprises the step of providing substrate having an antenna coupled to the transponder.

21. The method of claim 19, wherein the step of coupling a memory comprises the step of coupling a memory having image processing data stored therein.


22. The method of claim 19, wherein the step of coupling a memory comprises the step of coupling a memory that is a read/write memory.

23. The method of claim 19, wherein the step of providing a substrate comprises the step of providing a paper substrate.


24. The method of claim 19, wherein the step of providing a substrate comprises the step of providing a film substrate.

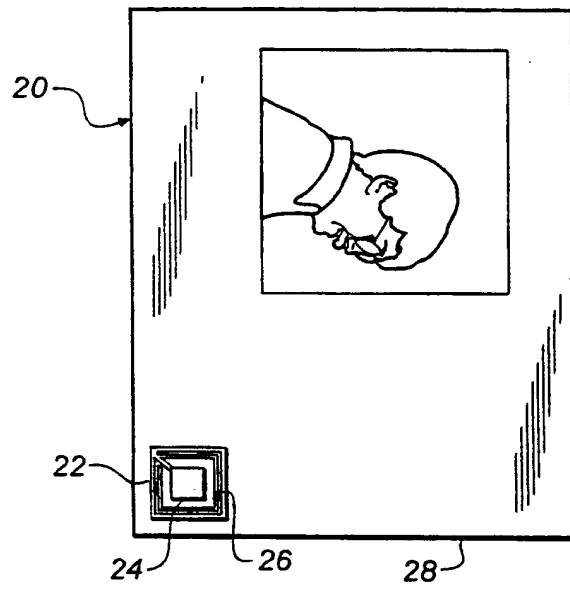


**FIG. 1**

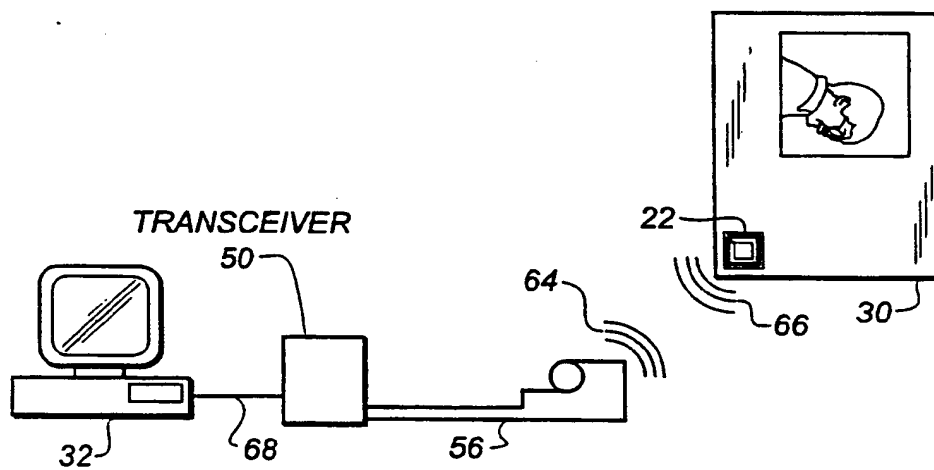

**FIG. 2**

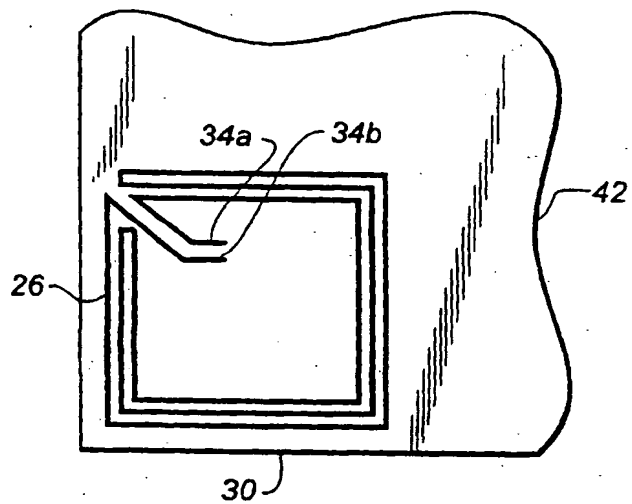

**FIG. 3a**

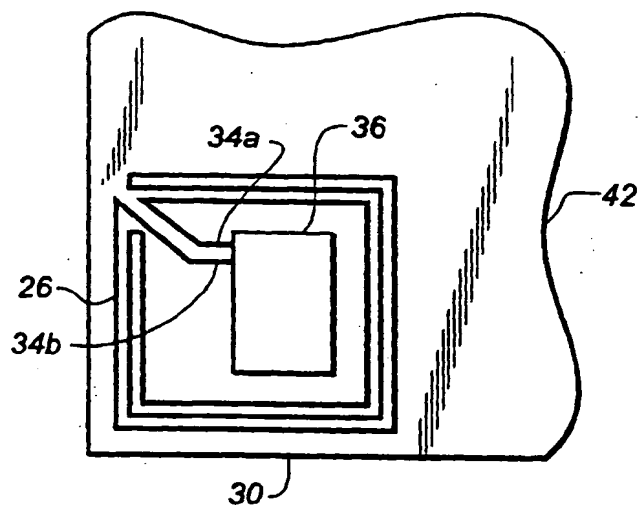

**FIG. 3b**

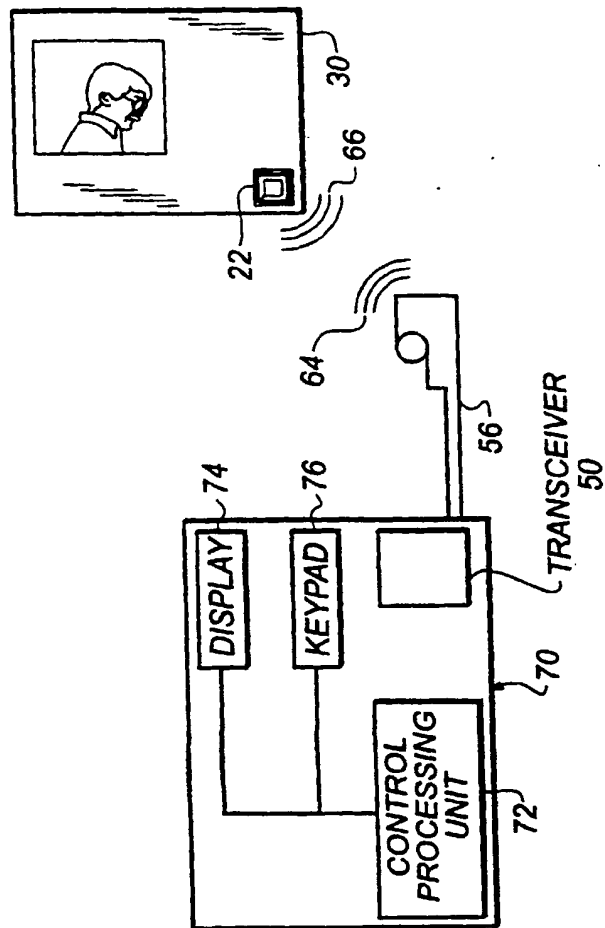


FIG. 4

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 076 316 A3**

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
20.11.2002 Bulletin 2002/47

(51) Int Cl.7: **G06K 19/077**, **G06K 7/08**,  
**G06K 19/08**

(43) Date of publication A2:  
14.02.2001 Bulletin 2001/07

(21) Application number: **00202722.5**

(22) Date of filing: **31.07.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Tehranchi, Babak, Eastman Kodak Company  
Rochester, New York 14650-2201 (US)
- Sanger, Kurt M., Eastman Kodak Company  
Rochester, New York 14650-2201 (US)
- Tredwell, Timothy, Eastman Kodak Company  
Rochester, New York 14650-2201 (US)

(30) Priority: **11.08.1999 US 372329**


(71) Applicant: **EASTMAN KODAK COMPANY**  
(a New Jersey corporation)  
Rochester, New York 14650 (US)

(74) Representative:  
Nunney, Ronald Frederick Adolphe et al  
Kodak Limited (W92)  
Patents  
Headstone Drive  
Harrow, Middlesex HA1 4TY (GB)

(72) Inventors:  
• Spurr, Robert W., Eastman Kodak Company  
Rochester, New York 14650-2201 (US)

(54) **A print having information associated with print stored in a memory coupled to the print**

(57) A print (30) having information associated with the print stored in a memory (24) coupled to the print. The print, processed by an image processing apparatus, having an attached memory for storing detailed information about the print and allowing contactless access using an electromagnetic frequency signal. A transceiver (50), connected to a control logic device (32), communicates with a transponder (22) that is attached to the print substrate and is integrally coupled to the memory. The transponder is capable of receiving a first electromagnetic field (frequency) from the transceiver and deriving power and address information from the first frequency, then generates a second electromagnetic field (frequency) in response, where the second electromagnetic field is characteristic of the data stored in memory.

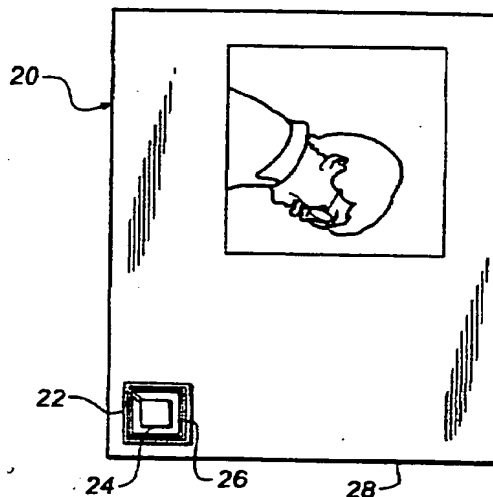

**FIG. 1**

**EP 1 076 316 A3**



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 20 2722

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 862 159 A (AGFA GEVAERT NV) 2 September 1998 (1998-09-02) * abstract * * page 5, line 43 - line 46 * * page 6, line 4 - line 7 * * page 6, line 19 - line 30 * * page 7, line 37 - line 49 *	1-10, 12-22,24	G06K19/077 G06K7/08 G06K19/08
Y	---	11,23	
Y	US 5 528 222 A (COTEUS PAUL W ET AL) 18 June 1996 (1996-06-18) * column 6, line 58 - column 7, line 11; figures 9,10 *	11,23	
X	US 5 849 230 A (MUROHARA MASARU) 15 December 1998 (1998-12-15)  *, sentence 39 - sentence 44 * * column 4, line 9 - line 14 * * figure 2 *	1-3,5-8, 10, 13-15, 17-20,22	
A	US 5 396 305 A (EGAWA AKIRA) 7 March 1995 (1995-03-07) * column 3, line 54 - column 4, line 26 * * column 5, line 11 - line 30 * * figures 5,6,9 *	1,7,13, 19	G03D G06K G03B
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>30 September 2002</b>	Examiner <b>Bhalodia, A</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons  & : member of the same patent family, corresponding document	

EPO FORM 1503 (3.02) (P04C01)

# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 00 20 2722

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-09-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0862159	A	02-09-1998	EP 0862159 A1	02-09-1998
			JP 10272106 A	13-10-1998
			US 6047257 A	04-04-2000
US 5528222	A	18-06-1996	AT 179270 T	15-05-1999
			CA 2153441 A1	10-03-1996
			CN 1118910 A	20-03-1996
			DE 69509242 D1	27-05-1999
			DE 69509242 T2	04-11-1999
			WO 9607985 A1	14-03-1996
			EP 0780007 A1	25-06-1997
			EP 0855675 A2	29-07-1998
			HU 76996 A2	28-01-1998
			JP 8088586 A	02-04-1996
			KR 191975 B1	15-06-1999
			PL 318977 A1	21-07-1997
			SG 46938 A1	20-03-1998
			ZA 9507078 A	11-03-1996
US 5849230	A	15-12-1998	JP 8235335 A	13-09-1996
			US 6069402 A	30-05-2000
US 5396305	A	07-03-1995	JP 2149833 A	08-06-1990
			JP 2763306 B2	11-06-1998
			JP 2149834 A	08-06-1990

FPO (CIV) (P43)

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**